kacab
www.krympslang.se

PET BRAIDED WRAP AROUND RODENT RESISTENCE / AETA

AETA

PET Braided Wrap Around - rodent resistence





Technical data


Product Name: AETA - PET Braided Wrap around - rodent resistence
Materials: Polyester
Working Temperature: -40°C~+150°C
Flammability: FMV SS302
Standard color: Black
Cutting Tool: Scissor and hot knife
Flame propagation rate: < 100 mm/min (complies with the requirement)
Certificate: RoHS2.0

Application

The product is widely used in the automotive, railway, telecommunications, and underground infrastructure industries to protect cable harnesses and piping from rodent damage.

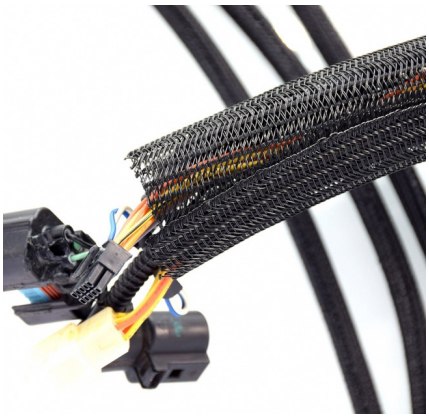







Standard specification

Item No.	Nominal diameter (mm)	Overlap	Functional Inner Diameter (mm)	Color	Packing (m/spool)
AETA-SCWW03	3	25%	4.0	Black	25
AETA-SCWW06	6	25%	7.5	Black	25
AETA-SCWW10	10	25%	10.0	Black	25
AETA-SCWW13	13	25%	14.0	Black	25
AETA-SCWW16	16	25%	17.0	Black	25
AETA-SCWW19	19	25%	20.0	Black	25
AETA-SCWW25	25	25%	26.0	Black	25
AETA-SCWW29	29	25%	30.0	Black	200
AETA-SCWW32	32	25%	33.0	Black	100
AETA-SCWW38	38	25%	40.0	Black	100
AETA-SCWW50	50	25%	50.0	Black	50

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess wether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.